


Interior Lighting

Emergency Corridor Light

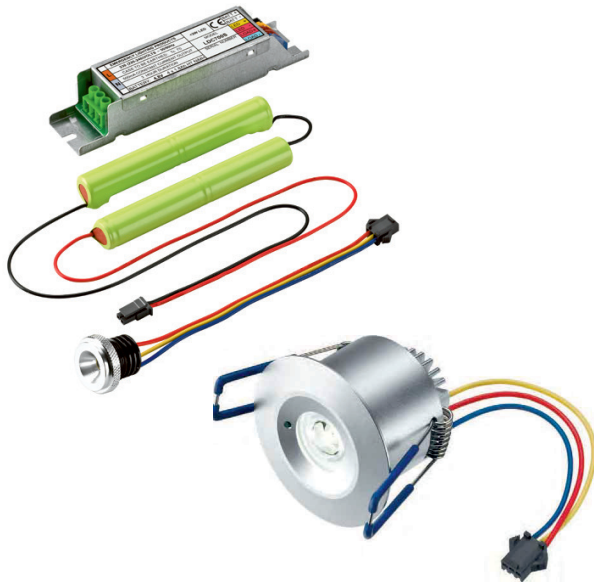

Selecting the correct fitting

Please ensure the required floor lux level is achieved with this device.

Please call our Technical Department for advice on 08456 434740

Applications

Office interiors
 Retail outlets
 Conference Centres
 Hotels
 Libraries
 Corridors & walkways

Description

These compact LED emergency lights are ideal for use where a small discrete unit is required.

The lens has been designed specifically to give a very long narrow beam for corridors.

During normal use they emit a low level green status light and, upon power failure, provide 100 lumens white light for 3 hours.

These are complete kits supplied with pre wired LED downlight, inverter and battery pack.

Features

Instant start

Benefits

Full brightness at turn on - improved safety

Specifications

Output	100 lumens output white LED
Status indicator	Green LED
Battery life	3 hour non maintained use
Battery	4.8V 1.8Ah NiMH
Supply	230 volt mains connection
Dimensions	
Battery	(Dia ϕ x L): 15 x 100mm (x2 pcs)
Inverter/Driver	(LxWxD): 130x28x25
Downlight	(Dia ϕ x L): 55 x 28mm (behind bezel) Push fit into 45mm ϕ hole

Spacing to achieve 1 lux

Mounting Height	Spacing
2m	10m
2.5m	10.8m
3m	11.9m

Ordering

ELE1W-COR